


CONSTRUCTION PRODUCTS REGULATION DECLARATION OF PERFORMANCE

NO: TAWC002 - ARC PRO-FLEX TILE ADHESIVE

1. Unique identification code of the product type	TAWC002 Arc Pro-Flex Tile Adhesive
2. Batch / serial No. identifying the construction product as required under Article 11(4)	See packaging for batch number and production date
3. Intended use in accordance with the harmonised standard:	Improved cementitious adhesive with additional characteristics and reduced slip for internal and external tiling.
4. Name & contact address of the Manufacturer	Arc Building Products IDA Business & Technology Park, Ballynattin, Arklow, Co. Wicklow, Ireland. Y14 A370
5. Authorised Representative	Not applicable
6. System of assessment & verification of constancy of performance	System 3
7. Notified Body	CERAM UK 1289 (133677) - 15239
8. European Technical Assessment	Not Applicable

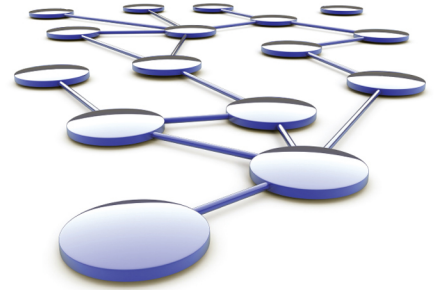

9. Declared performance	EN12004:2007 + A1 2012 C2TE																										
<table border="1"> <thead> <tr> <th>Essential characteristics</th> <th>Performance</th> </tr> </thead> <tbody> <tr> <td>Classification</td> <td>C2TE</td> </tr> <tr> <td>Reaction to Fire</td> <td>Class E</td> </tr> <tr> <td>Release of Dangerous substances</td> <td>See MSDS</td> </tr> <tr> <td colspan="2">Bond Strength as:</td> </tr> <tr> <td>Early Tensile Adhesion Strength</td> <td>≥0.5N/mm²</td> </tr> <tr> <td>Initial Tensile Adhesion Strength</td> <td>≥1N/mm²</td> </tr> <tr> <td>Open Tensile Adhesion Strength(30min)</td> <td>≥0.5N/mm²</td> </tr> <tr> <td colspan="2">Durability as:</td> </tr> <tr> <td>Tensile Adhesion After Heat Ageing</td> <td>≥1N/mm²</td> </tr> <tr> <td>Tensile Adhesion After Water Immersion</td> <td>≥1N/mm²</td> </tr> <tr> <td>Tensile Adhesion After Freeze Thaw Cycling</td> <td>≥1N/mm²</td> </tr> <tr> <td>Notified Body Reference</td> <td>1289</td> </tr> </tbody> </table>		Essential characteristics	Performance	Classification	C2TE	Reaction to Fire	Class E	Release of Dangerous substances	See MSDS	Bond Strength as:		Early Tensile Adhesion Strength	≥0.5N/mm ²	Initial Tensile Adhesion Strength	≥1N/mm ²	Open Tensile Adhesion Strength(30min)	≥0.5N/mm ²	Durability as:		Tensile Adhesion After Heat Ageing	≥1N/mm ²	Tensile Adhesion After Water Immersion	≥1N/mm ²	Tensile Adhesion After Freeze Thaw Cycling	≥1N/mm ²	Notified Body Reference	1289
Essential characteristics	Performance																										
Classification	C2TE																										
Reaction to Fire	Class E																										
Release of Dangerous substances	See MSDS																										
Bond Strength as:																											
Early Tensile Adhesion Strength	≥0.5N/mm ²																										
Initial Tensile Adhesion Strength	≥1N/mm ²																										
Open Tensile Adhesion Strength(30min)	≥0.5N/mm ²																										
Durability as:																											
Tensile Adhesion After Heat Ageing	≥1N/mm ²																										
Tensile Adhesion After Water Immersion	≥1N/mm ²																										
Tensile Adhesion After Freeze Thaw Cycling	≥1N/mm ²																										
Notified Body Reference	1289																										

The performance of the above product identified in points 1 & 2 is in conformity with the declared performance in point 9. This declaration of performance is issued under the sole responsibility of The manufacturer identified in point 4.



James Ivancia

Arklow

Place

03/02/2023

Date