

# Technical Data Sheet

Date of compilation: 09/08/2021

## ARC TROWEL MASTIC

### DESCRIPTION

An easy to apply bituminous mastic, formulated using high quality raw materials.

### USES

Can be used for filling cracks, holes, gaps etc., on roofing and most construction materials.


### APPLICATION

DO NOT THIN.

Can be applied to damp, but not wet, substrates. Surfaces to be treated should be clean, dry and free from dust, lichen etc.

Apply the mastic using a trowel or knife, forcing the product into the crack or gap and scraping away excess. It may be advantageous, if practical, to prime surfaces before application of mastic, using Arc Bitumen Primer. Do not apply over tar based products, or surfaces that can rise above 65°C.

All tools should be cleaned using white spirit.

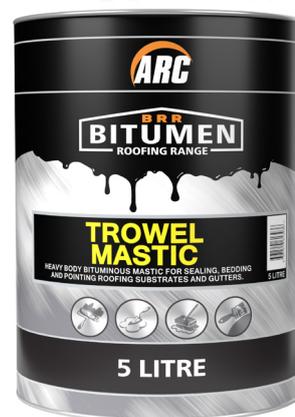

### PHYSICAL PROPERTIES

Property	Value
Solvent	White Spirit
Flash point	39°C min. (closed cup)
Viscosity	Stiff Mastic
Specific Gravity	1.40-1.50 @ 20°C

### STORAGE & PACKAGING

This product should be stored out of direct sunlight at 8°C - 25°C. It is supplied in 1lt, 2.5lt, 5lt and 25lt containers.

### HEALTH & SAFETY

This product contains a hydrocarbon solvent and frequent or prolonged contact with the skin should be avoided. Any splashes on the skin should be removed as quickly as possible, using white spirit, paraffin or a recommended hand cleaner, and the skin then washed with soap and water. The product is inflammable and should not be applied near sources of ignition. Ensure adequate ventilation.

For more information and precautions for use refer to the safety data sheet.

# Technical Data Sheet

*Date of compilation: 09/08/2021*

## ARC TROWEL MASTIC

### NOTE

All products should be sold in accordance with the manufacturer's instructions. The manufacturer cannot be held responsible where conditions of use are beyond our control. Full information and advice is freely available from our Technical Services Department e-mail [technical@arcbuildingproducts.ie](mailto:technical@arcbuildingproducts.ie). Whilst any information contained herein is to the best of our knowledge true and accurate, no warranty is given or implied in connection with any recommendations or suggestions made by us, our representatives, agents, or distributors, as the conditions of use and any labour involved are beyond our control. Our warranty is therefore limited to the quality of supplied product.